
DEEK Load cell

DEEK



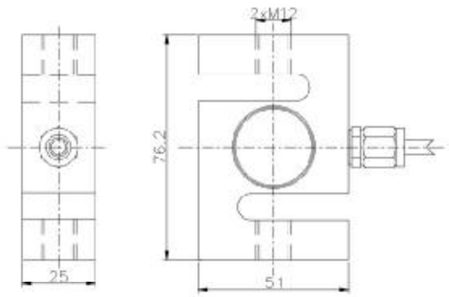

吊钩秤、配料秤、包装秤、机电结合秤及专用测力装置
Crane scale,blending scale,packing scale,electromechanical scale,special testing device


TECHNICAL PARAMETER| Wires:Sen+(蓝,Blue);Sig+(白,White);Exc-(黑,Black);Sig-(红,Red)

额定载荷Rated load	200,300,500kg，1t	绝缘电阻Insulation resistance	≥5000 MΩ
精度等级 Accuracy class	0.03	额定温度 Nominal Temp Range	-10~+40℃
灵敏度Sensitivity	2.0±0.005mV/V	工作温度范围Service Temp Range	-30~+70℃
线性误差 Non-linearity	±0.03%F.S	安全负载Safe load limit	150%F.S
滞后误差 Hysteresis error	±0.03%F.S	破坏负载Breaking load	200%F.S
蠕变（30分钟）Creep(30min)	±0.03%F.S	额定激励电压Nominal of range excitation	10~12 V DC
零点温度影响TC ZERO	±0.02%F.S/10℃	密封等级Protection Class	IP67
灵敏度温度影响TC SPAN	±0.02%F.S/10℃	材料Material	不锈钢Stainless steel
输入阻抗Input resistance	400±20Ω	电缆Cable	Length:3m
输出阻抗Output resistance	352±3Ω		Diameter:Φ5

DEL Load cell

DEL



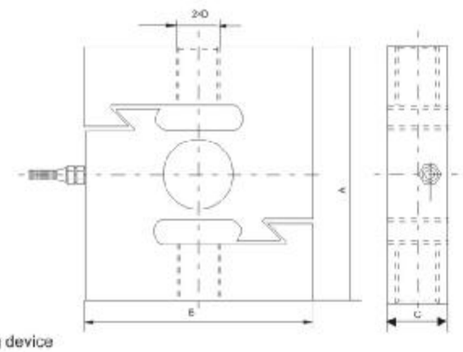

额定载荷(t) Rated Load 0.05,0.1,0.2,0.25 0.3,0.5,0.75	A	B	C	D
1,1.5	80	70	25	M12
2,3,5	108	95	25	M18x1.5
7.5,10	178	130	51	M30x2
15,20	190	160	60	M39x2

吊钩秤、配料秤、包装秤、机电结合秤及专用测力装置
Crane scale,blending scale,packing scale,electromechanical scale,special testing device


TECHNICAL PARAMETER| 4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷Rated load	0.05,0.1,0.2,0.25,0.3,0.5,0.75,1,	绝缘电阻Insulation resistance	≥5000 MΩ
	1.5,2,3,5,7,10,15,20t	额定温度 Nominal Temp Range	-10~+40℃
灵敏度Sensitivity	2.0±0.002mV/V	工作温度范围Service Temp Range	-30~+70℃
综合误差Total error	±0.05%F.S	安全负载Safe load limit	150%F.S
线性误差 Non-linearity	±0.03%F.S	破坏负载Breaking load	200%F.S
滞后误差 Hysteresis error	±0.03%F.S	额定激励电压Nominal of range excitation	10~12 V DC
蠕变（30分钟）Creep(30min)	±0.03%F.S	密封等级Protection Class	IP65(0.05~5t)
零点温度影响TC ZERO	±0.03%F.S/10℃		IP67(7.5~20t)
灵敏度温度影响TC SPAN	±0.03%F.S/10℃	材料Material	合金钢Alloy Stell 不锈钢Stainless steel
输入阻抗Input resistance	400±20Ω	电缆Cable	Length=6m
输出阻抗Output resistance	352±3Ω		Diameter:Φ5mm

PST Load cell

PST



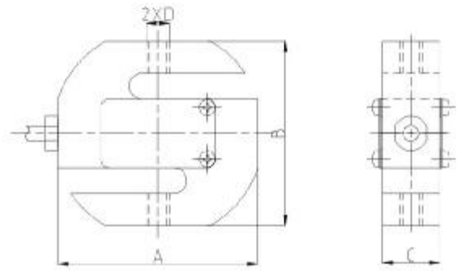


吊钩秤、配料秤、包装秤、机电结合秤及专用测力装置
Crane scale,blending scale,packing scale,electromechanical scale,special testing device

额定载荷	A	B	C	D
20~150kg	70	64	12	M8
200~500kg	70	64	20	M12
700~1000kg	70	64	25	M12
1.5~5t	88	90	32	M20
7.5t	88	90	40	M24

TECHNICAL PARAMETER| 4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷Rated load	20,30,50,75,100,150,200,250,300,500,	绝缘电阻Insulation resistance	≥5000 MΩ
	700,750kg ,1t,1.5t,2t,3t,5t,7.5t	额定温度 Nominal Temp Range	-10~+40℃
精度等级 Accuracy class	C3	工作温度范围Service Temp Range	-30~+70℃
灵敏度Sensitivity	2.0±0.003mV/V	安全负载Safe load limit	150%F.S
线性误差 Non-linearity	±0.03%F.S	破坏负载Breaking load	200%F.S
滞后误差 Hysteresis error	±0.03%F.S	额定激励电压Nominal of range excitation	10~12 V DC
蠕变（30分钟）Creep(30min)	±0.03%F.S	密封等级Protection Class	IP66(20kg~1t) ,IP68(1.5t~7.5t)
零点温度影响TC ZERO	±0.02%F.S/10℃	材料Material	合金钢Alloy Stell
灵敏度温度影响TC SPAN	±0.02%F.S/10℃		不锈钢Stainless Stell
输入阻抗Input resistance	400±20Ω(1.5t~7.5t)	电缆Cable	Length=2.6m(20kg~1t),
输出阻抗Output resistance	352±5Ω		3m(1.5~7.5t)


20kg~1t

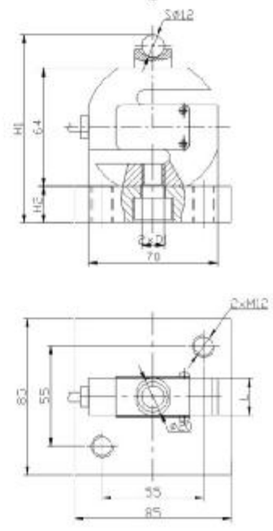

额定载荷 Rated Load	H1	H2	D1	L
20~150kg	97	15	M8	12
200~500kg	103	19	M12	20
700~1000kg	103	19	M12	25

2t~7.5t

总装B附件

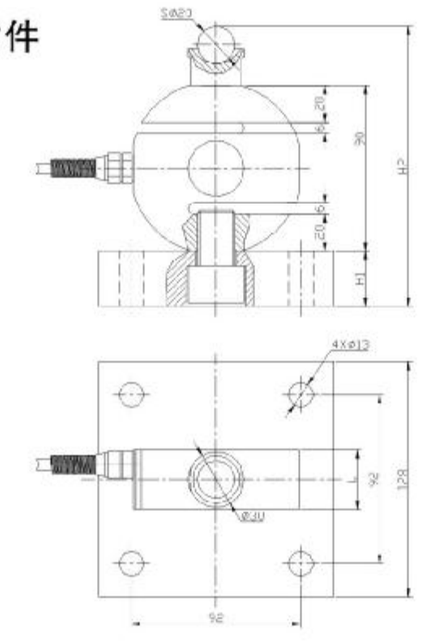

额定载荷 Rated Load	H1	H2	L
2~5t	29	151	32
7.5t	34	156	40

PDF 檔案使用 "pdfFactory Pro" 試用版本建立 www.pdffactory.com