
BM–24–401/402/403

Short description

- Assembled with load cell BM24R.
- AISI 304 stainless steel and Rocker–pin load introduction.
- Built–in horizontal movement control and lift–off protection.
- Easy load cell (re) placement after mount installation.
- Suitable for process control, batch weighing, silo/hoppers and belt scale applications.

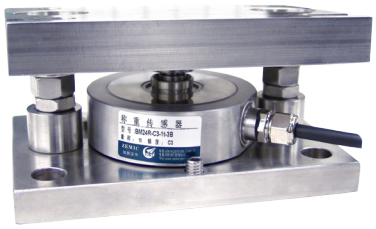

Capacity \ Dimension	A	B	C	D	ΦE	F	G	H	I
250kg / 500kg / 1t	150	120	100	70	Φ14	20	15	75	110
2t / 3.5t / 5t	160	120	110	70	Φ16	20	20	100	––
10t / 13t	210	175	120	85	Φ18	25	20	110	––

Specifications				
Model number		BM–24–401	BM–24–402	BM–24–403
Capacity		250kg / 500kg / 1t	2t / 3.5t / 5t	10t / 13t
Maximum vertical force without load cell	KN	15	30	50
Maximum lift off force	KN	10	20	30
Maximum horizontal force in all directions	KN	5	10	20
Maximum horizontal movement	mm	±3	±3	±3
Installation height	mm	80	105	117
Working height	mm	75	100	110

