
ZEMIC

G0E TYPE SOLENOID VAVLE

G0E-2T12/24-N2-K2



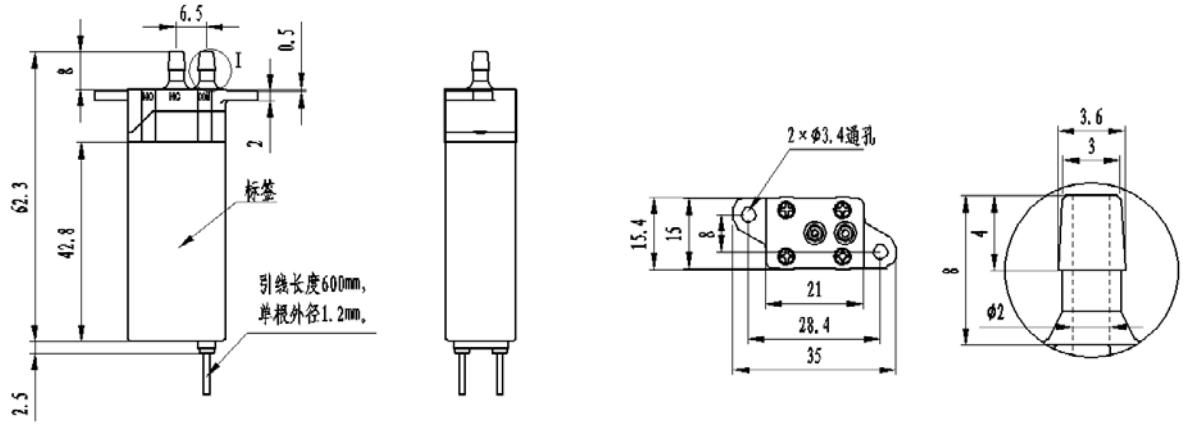

Technical Characteristics	
Overall dimension (mm)	15.4×21×64.7
Environment temp. (°C)	5~50
Liquid temp.(°C)	5~50
Nmrmal diameter(mm)	ϕ2.0
Pressure range (KPa)	COM:-90~220 NC:-90～200
Pressure resistance (KPa)	300
Interface	Cone-shaped joint with AAX02004 tube
Working voltage (V)	DC12/24±10%
Power (W)	3.3
Response time (ms)	≤25
Flow coefficient Cv	0.06
Insulation coil grade	Grade F
IP protection class	IP65
Life span	3 million times
Contact Fluid Materials	
Type	Material
Valve body	PPS
Sealing	FKM
Resistance To Liquids	
Weak acid, weak bases and others corrosive liquid.	
Caution	
Avoid to use sticky, easy crystalizing or faulty liquids.	

Add: No.166, West Avenue, Hi-Tech District, Xi'an, Shaanxi, China.
Phone: (86) 135 7262 5426 Tel: (86) 029 6180 7835
Email:xjliang@zemic.com.cn


There is no special declaration if any change in the specification. ZEMIC reserves the rights in the final interpretation and modification.

ZEMIC

G0E TYPE SOLENOID VAVLE

G0E-3T12/24-N2-K2



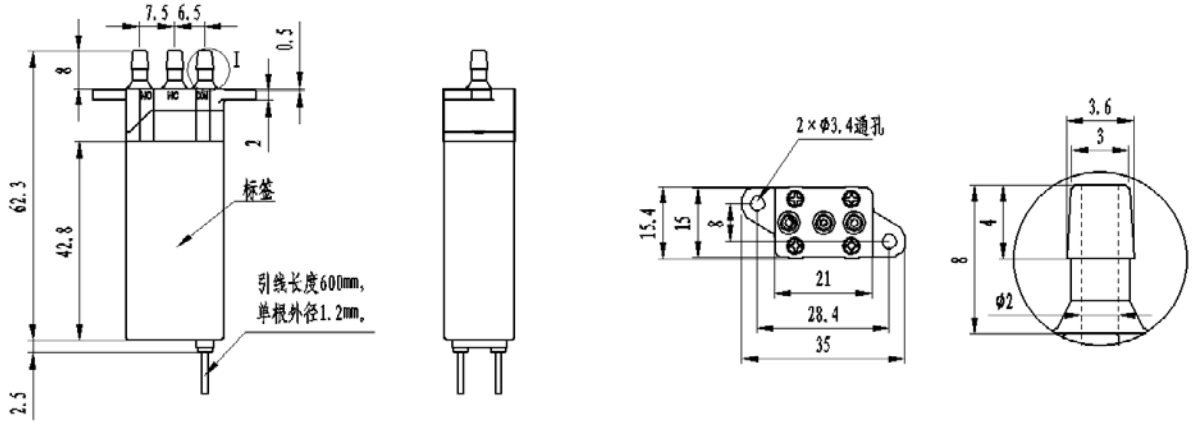

Technical Characteristics	
Overall dimension (mm)	15.4×21×64.7
Environment temp. (°C)	5~50
Liquid temp.(°C)	5~50
Nmrmal diameter(mm)	ϕ2.0
Pressure range (KPa)	COM:-90~220 NC:-90～200 NO:-90~200
Pressure resistance (KPa)	300
Interface	Cone-shaped joint with AAX02004 tube
Working voltage (V)	DC12/24±10%
Power (W)	3.3
Response time (ms)	≤25
Flow coefficient Cv	0.06
Insulation coil grade	Grade F
IP protection class	IP65
Life span	3 million times
Contact Fluid Materials	
Type	Material
Valve body	PPS
Sealing	FKM
Resistance To Liquids	
Weak acid, weak bases and others corrosive liquid.	
Caution	
Avoid to use sticky, easy crystalizing or faulty liquids.	

Add: No.166, West Avenue, Hi-Tech District, Xi'an, Shaanxi, China.
Phone: (86) 135 7262 5426 Tel: (86) 029 6180 7835
Email:xjliang@zemic.com.cn

There is no special declaration if any change in the specification. ZEMIC reserves the rights in the final interpretation and modification.