

ZEMIC

FLAPPER VALVE

D0A-2T24-N12B-PI-G4



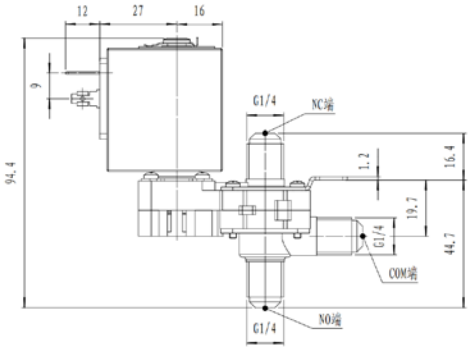

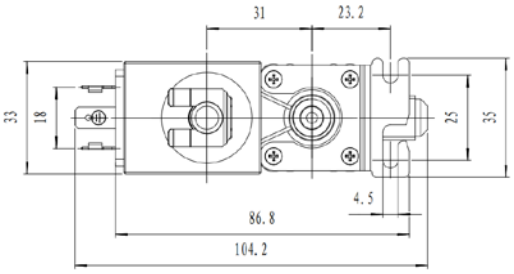

Technical Characteristics	
Number of ports	3
Standard voltage (V)	DC24±10%
Power (W)	9
Nominal diameter (mm)	ϕ3.2
Environment temp. (°C)	-10 ～+60
Flow Kv(m^3/h)	0.28
Maximum prussure (MPa)	1.5
Use working pressure (Mpa)	COM:-0.06～1.0 NC:-0.06～0.2 NO:-0.06～0.09
Response times (ms)	⩽25
Medium requirement	Not corrode contact materials liquids
IP protection class	IP65
Life span	300
Type	NC
Valve body material	PEI
Medium interface specification	1/4 pipe thread
Liquid contect material	
Name	Material
Valve body	PEI
Sealing	EPDM/316
Resistance To Liquids	
Pure water,diluent,detergent,not corrode contact materials liquids.	
Caution	
The major parts of the valve are made of PI plastics. Caution for dropping, and avoid to plug the connection tube by sharp tools.	

Add: No.166, West Avenue, Hi-Tech District, Xi'an, Shaanxi, China.
Phone: (86) 135 7262 5426 Tel: (86) 029 6180 7835
Email:xjliang@zemic.com.cn

There is no special declaration if any change in the specification. ZEMIC reserves the rights in the final interpretation and modification.