
HM-8-402

SHORT DESCRIPTION

- Compact construction, easy installation.
- Adjustable mounting height,
- Using under heavy static load or slight dynamic load.

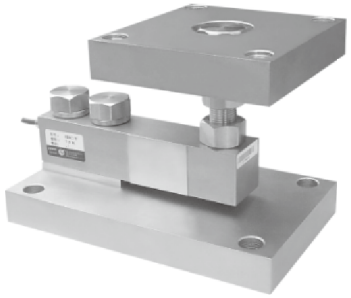


Alloy steel,assembled with: H8C,B8D.

AVAILABLE MODELS

Capacity	Capacity
0.5t-2t	HM-8-402-0.5/2t
2.5t-5t	HM-8-402-2.5/5t
1klb-5KSE	HM-8-402-1/5KSE
5klb-10klb	HM-8-402-5/10K

OUTLINE DIMENSION MM(INCH)

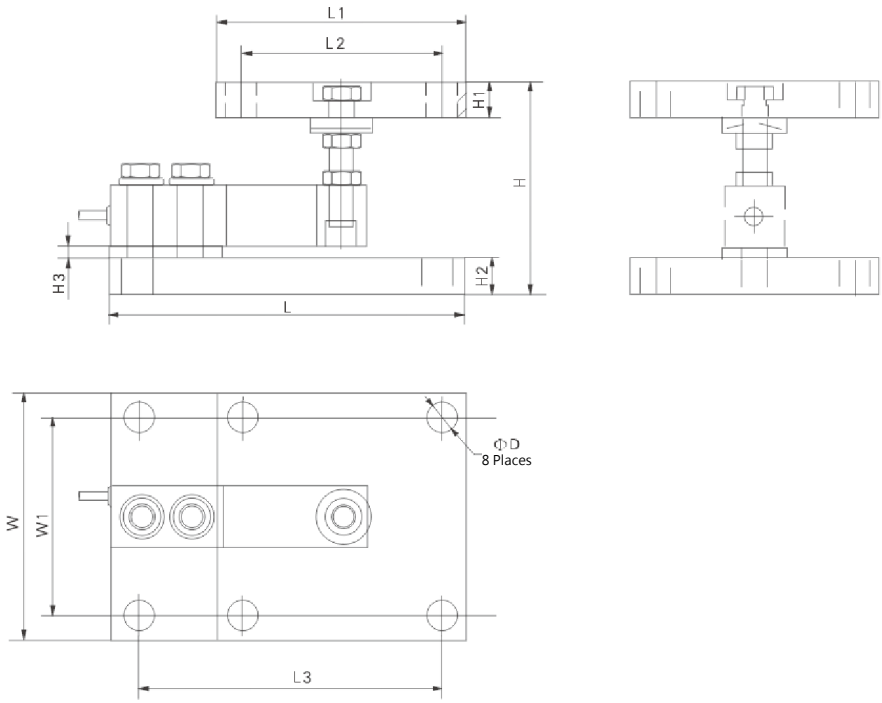

Dimension / Capacity(t)	L	L1	L2	L3	H	H1	H2	H3	W	W1	D
0.5t-2t (1klb-5KSE)	180.9 (7.12)	127 (5.0)	101.6 (4.0)	152.4 (6.0)	100-120 (3.94-4.72)	18 (0.71)	18 (0.71)	4.0 (0.16)	127 (5.0)	101.6 (4.0)	16 (0.63)
2.5t-5t (5klb-10klb)	215.9 (8.5)	127 (5.0)	101.6 (4.0)	177.8 (7.0)	130-150 (5.12-5.91)	26 (1.02)	26 (1.02)	4.0 (0.16)	127 (5.0)	101.6 (4.0)	16 (0.63)